



# DryTAG RH Temp/RH Sensor

## Thermo-Hygrometer

The **PHOENIX DRYTAG RH** is a Bluetooth beacon with temperature and relative humidity sensors. It can be used as a standalone thermo-hygrometer or it can be attached to the outlet of any dehumidifier allowing it to report into the DryLINK® app. It also contains an accelerometer to let you know if your dehumidifier has been turned off or lost power. You can add the Phoenix DryTAG RH to any brand of equipment. For more information on the DryLINK App and DryTAG RH, visit [UsePhoenix.com/DryLINK/ecosystem/](http://UsePhoenix.com/DryLINK/ecosystem/).



Scan QR code for more information on DryLINK



### BENEFITS

- Use as a standalone thermo-hygrometer to automate the unaffected area, affected area, HVAC, or outside conditions
- Add any dehumidifier to DryLINK with automated data collection of psychometric readings
- Built-in accelerometer tracks hours of usage automatically and can notify you if equipment is turned off
- Easy retrofit - just mount to the inside of the outlet grill
- Serial number, hours of usage, manufacturer, model automatically transferred to the DryLINK drying report

### JOB STATUS AND EQUIPMENT ALERTS


- Select users to receive alerts
- Dehumidifier not connected/no power (with DryPHONE)
- High/Low chamber Temp/RH (with DryPHONE)
- GPP slow to decrease with selectable time and GPP (with DryPHONE)
- Filter needs to be changed

### REMOTE MONITORING - (REQUIRES DRYPHONE)

- Take daily readings remotely
- Monitor the jobsite remotely
- Prioritize your site visits based on remote readings
- Bill for remote monitoring in Xactimate (WTRRM - \$55/day)

### INVENTORY TRACKING

- Last known location shown on a map - no monthly fee

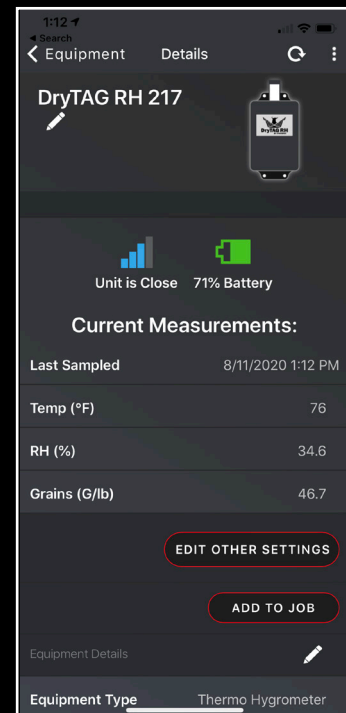

Part Number 4041915

Battery Included: 2/3 AA, Lithium 3.6V